




**PGM 255
Bamilex XP403 Polyester Mat
Reinforced with 5 x 5 Polyester Scrim**

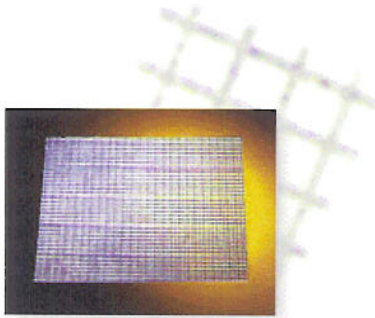

A thermally set, spunbonded polyester nonwoven fabric made up of 100% continuous polyester filament fibers that are randomly arranged and reinforced with a 5 x 5 polyester scrim for added strength and stability. XP403 has high tensile and tear strength, wets out well with both cold applied cutbacks and emulsions, non-raveling, moisture, rot and mildew resistant, lightweight, good sunlight resistance and possesses good elongation and recovery properties when properly applied. Compatible with oxidized asphalt and cold tar bitumen for use in hot mop system. Excellent repair fabric for both new and old construction in roofing and waterproofing applications. Other applications include: foundations, slabs, tunnels, subways, pipeline joint wrap, parapet wall treatment, tennis courts, and plaza decks.

Roll Size	Product Code	Rolls/Case	Case Weight
4" x 180'	255-01	54	54 lbs.
6" x 180'	255-02	36	54 lbs.
9" x 180'	255-03	24	54 lbs.
12" x 180'	255-04	18	54 lbs.
18" x 180'	255-05	12	54 lbs.
36" x 180'	255-06	6	54 lbs.

Physical Properties

Average Net Weight (ounces per square yard)	2.25
Strip Tensile Strength (pounds per inch)	
Machine Direction	45
Cross Machine Direction	40
Strip Elongation At Break (%)	
Machine Direction	20
Cross Machine Direction	20
Trapezoid Tear Strength*(lbs.) (Median Load)	
Machine Direction	12
Cross Machine Direction	11

*ASTM D 1117

**Back To
Polyester & Polypropylene Fabrics**

[Home](#) | [Link To SGTF.COM](#) | [Back to Polyester & Polypropylene Fabrics](#)